




# MAX-FAN PRO SERIES 160 - 615 m<sup>3</sup>/h

## TECHNICAL DATASHEET

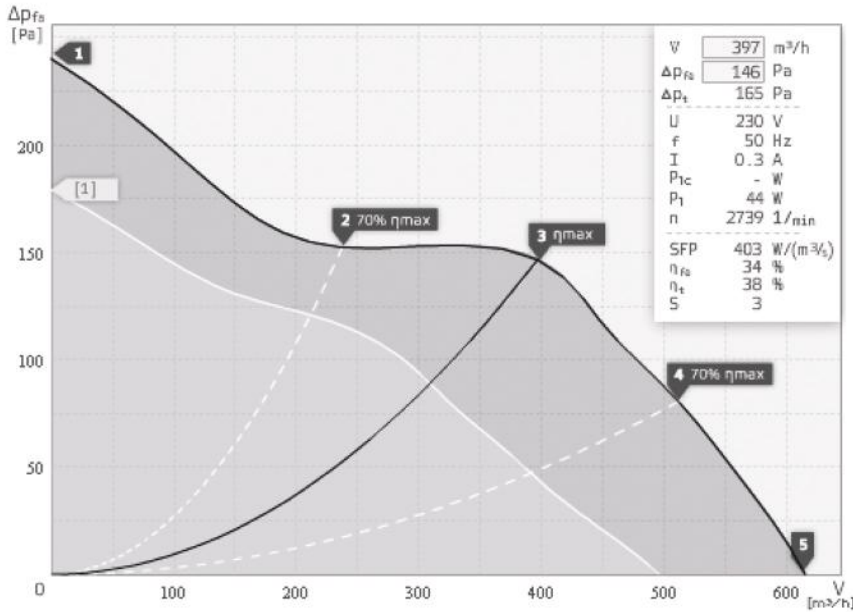

- Diagonal impeller with stator
- With Plastic housing
- With 2-step switch
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power Consumption P1	W	42	40	44	45	43
RPM n	1/min	2788	2802	2739	2738	2774
SPL inlet LWA5	dB(A)	67	67	66	67	68
SPL outlet LWA6	dB(A)	67	67	66	67	69
SPL casing break out LWA2	dB(A)	-	-	-	-	-

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	66	28	33	52	64	58	57	54	48
Outlet	LWA6	66	28	37	54	61	63	57	57	51
Casing	LWA2	-	-	-	-	-	-	-	-	-

EM 160 E2S 01   126362	
Voltage UN	230 V 1~
Current Imax	0,3
Ambient Temperature tA	60 °C
Medium Temperature tM	60 °C
Speed Control	2-1
Motor Protection	TAI
Isolation Class	F
Weight	2,5 kg

