

TelosTM

DATASHEET | 6 PRO

MARKET- LEADING PRODUCT LIFESPAN

With an L80 of 85,000 hours, performance is guaranteed for up to ten years of continuous use.

UPGRADABLE MODULAR DESIGN

The entire unit has been designed to enable the LED boards to be upgraded as technology changes. The Pro version incorporates the latest generation of OSRAM LEDs.



WIDE ANGLE LIGHT SPREAD

The optics designed by our in house experts give a 87.6 degrees beam angle and provide an even distribution of light.

HIGHLY WATERPROOF

This product has been tested to withstand high pressure jets, as well as being protected from dust and other particles.

SAFETY


Giving you piece of mind - Certified with an Extra Safe Low Voltage.

TELOSTM6 PRO


The latest version of a tried and tested, modern and efficient LED luminaire. Now featuring a slimmer, lightweight design and high output OSRAM LEDs. Suitable for top-down growing applications, commercial greenhouses, and harsh environments such as advanced medical facilities. The use of passive natural convection has eliminated the need for a fan, reducing noise output and significantly increasing the life span of the light as it contains no moving parts.

The Telos ethos is to design and manufacture the most efficient, reliable and robust grow lights available on the market.

DIMENSIONS

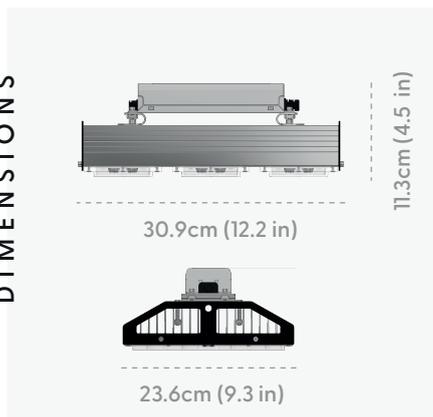

SPECTRUM

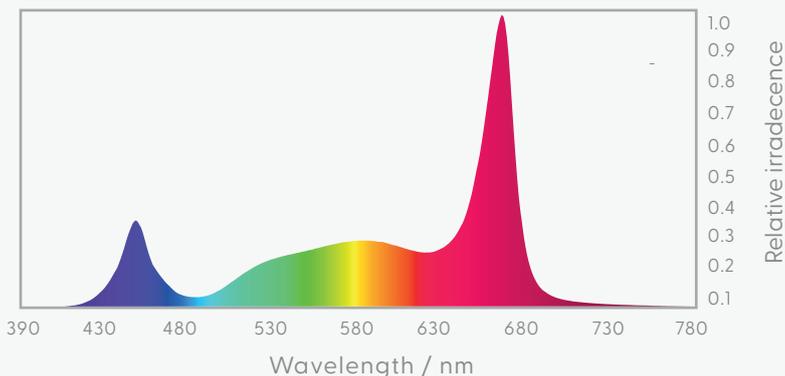

SPECIFICATION

LIGHT OUTPUT PPF (umoles)	420
CALCULATED EFFICACY (380 nm - 820 nm) (umoles/Joule)	2.4
TESTED AT (380 nm - 820 nm) (umoles/Joule)	2.42
COLOUR RENDERING INDEX (CRI)	86.9
LUMINAIRE COLOUR TEMPERATURE (KELVIN)	3160
BEAM ANGLE	87.6 degrees
LIGHT OUTPUT DEPRECIATION	85,000 L90

POWER INPUT	175W
POWER INPUT RANGE	17.5 - 215W (Dimmable driver)
VOLTAGE INPUT RANGE	90 - 305VAC (Autosensing)
FREQUENCY INPUT RANGE	47 - 63Hz
INPUT CURRENT	.76A / 230VAC
MAX NUMBER OF TELOS SYSTEMS LINKED (POWER)	10
POWER CABLES & CONNECTIONS	UK or EU plug to waterproof Weiland interface with Telos system (supplied as standard).

SYSTEM WEIGHT (LAMP AND DRIVER)	4kg
DIMENSIONS (L X W X H)	309mm, 236mm, 113mm
INGRESS PROTECTION	IP66
COOLING METHOD	Passive / Natural
NOMINAL OPERATING TEMPERATURE RANGE	0 - 40 °C

PHOTOBIOLOGICAL SAFETY	EN62471:2009 - Risk group: 1
CERTIFICATIONS	CE marked, RoHS compliance, EMC and EMI certified
WARRANTY	3 Years (limited). See the Telos warranty statement.
DATA TOLERANCE	+/- 5% on all flux and power measurements

APPLICATION NOTE

